
REV


REV

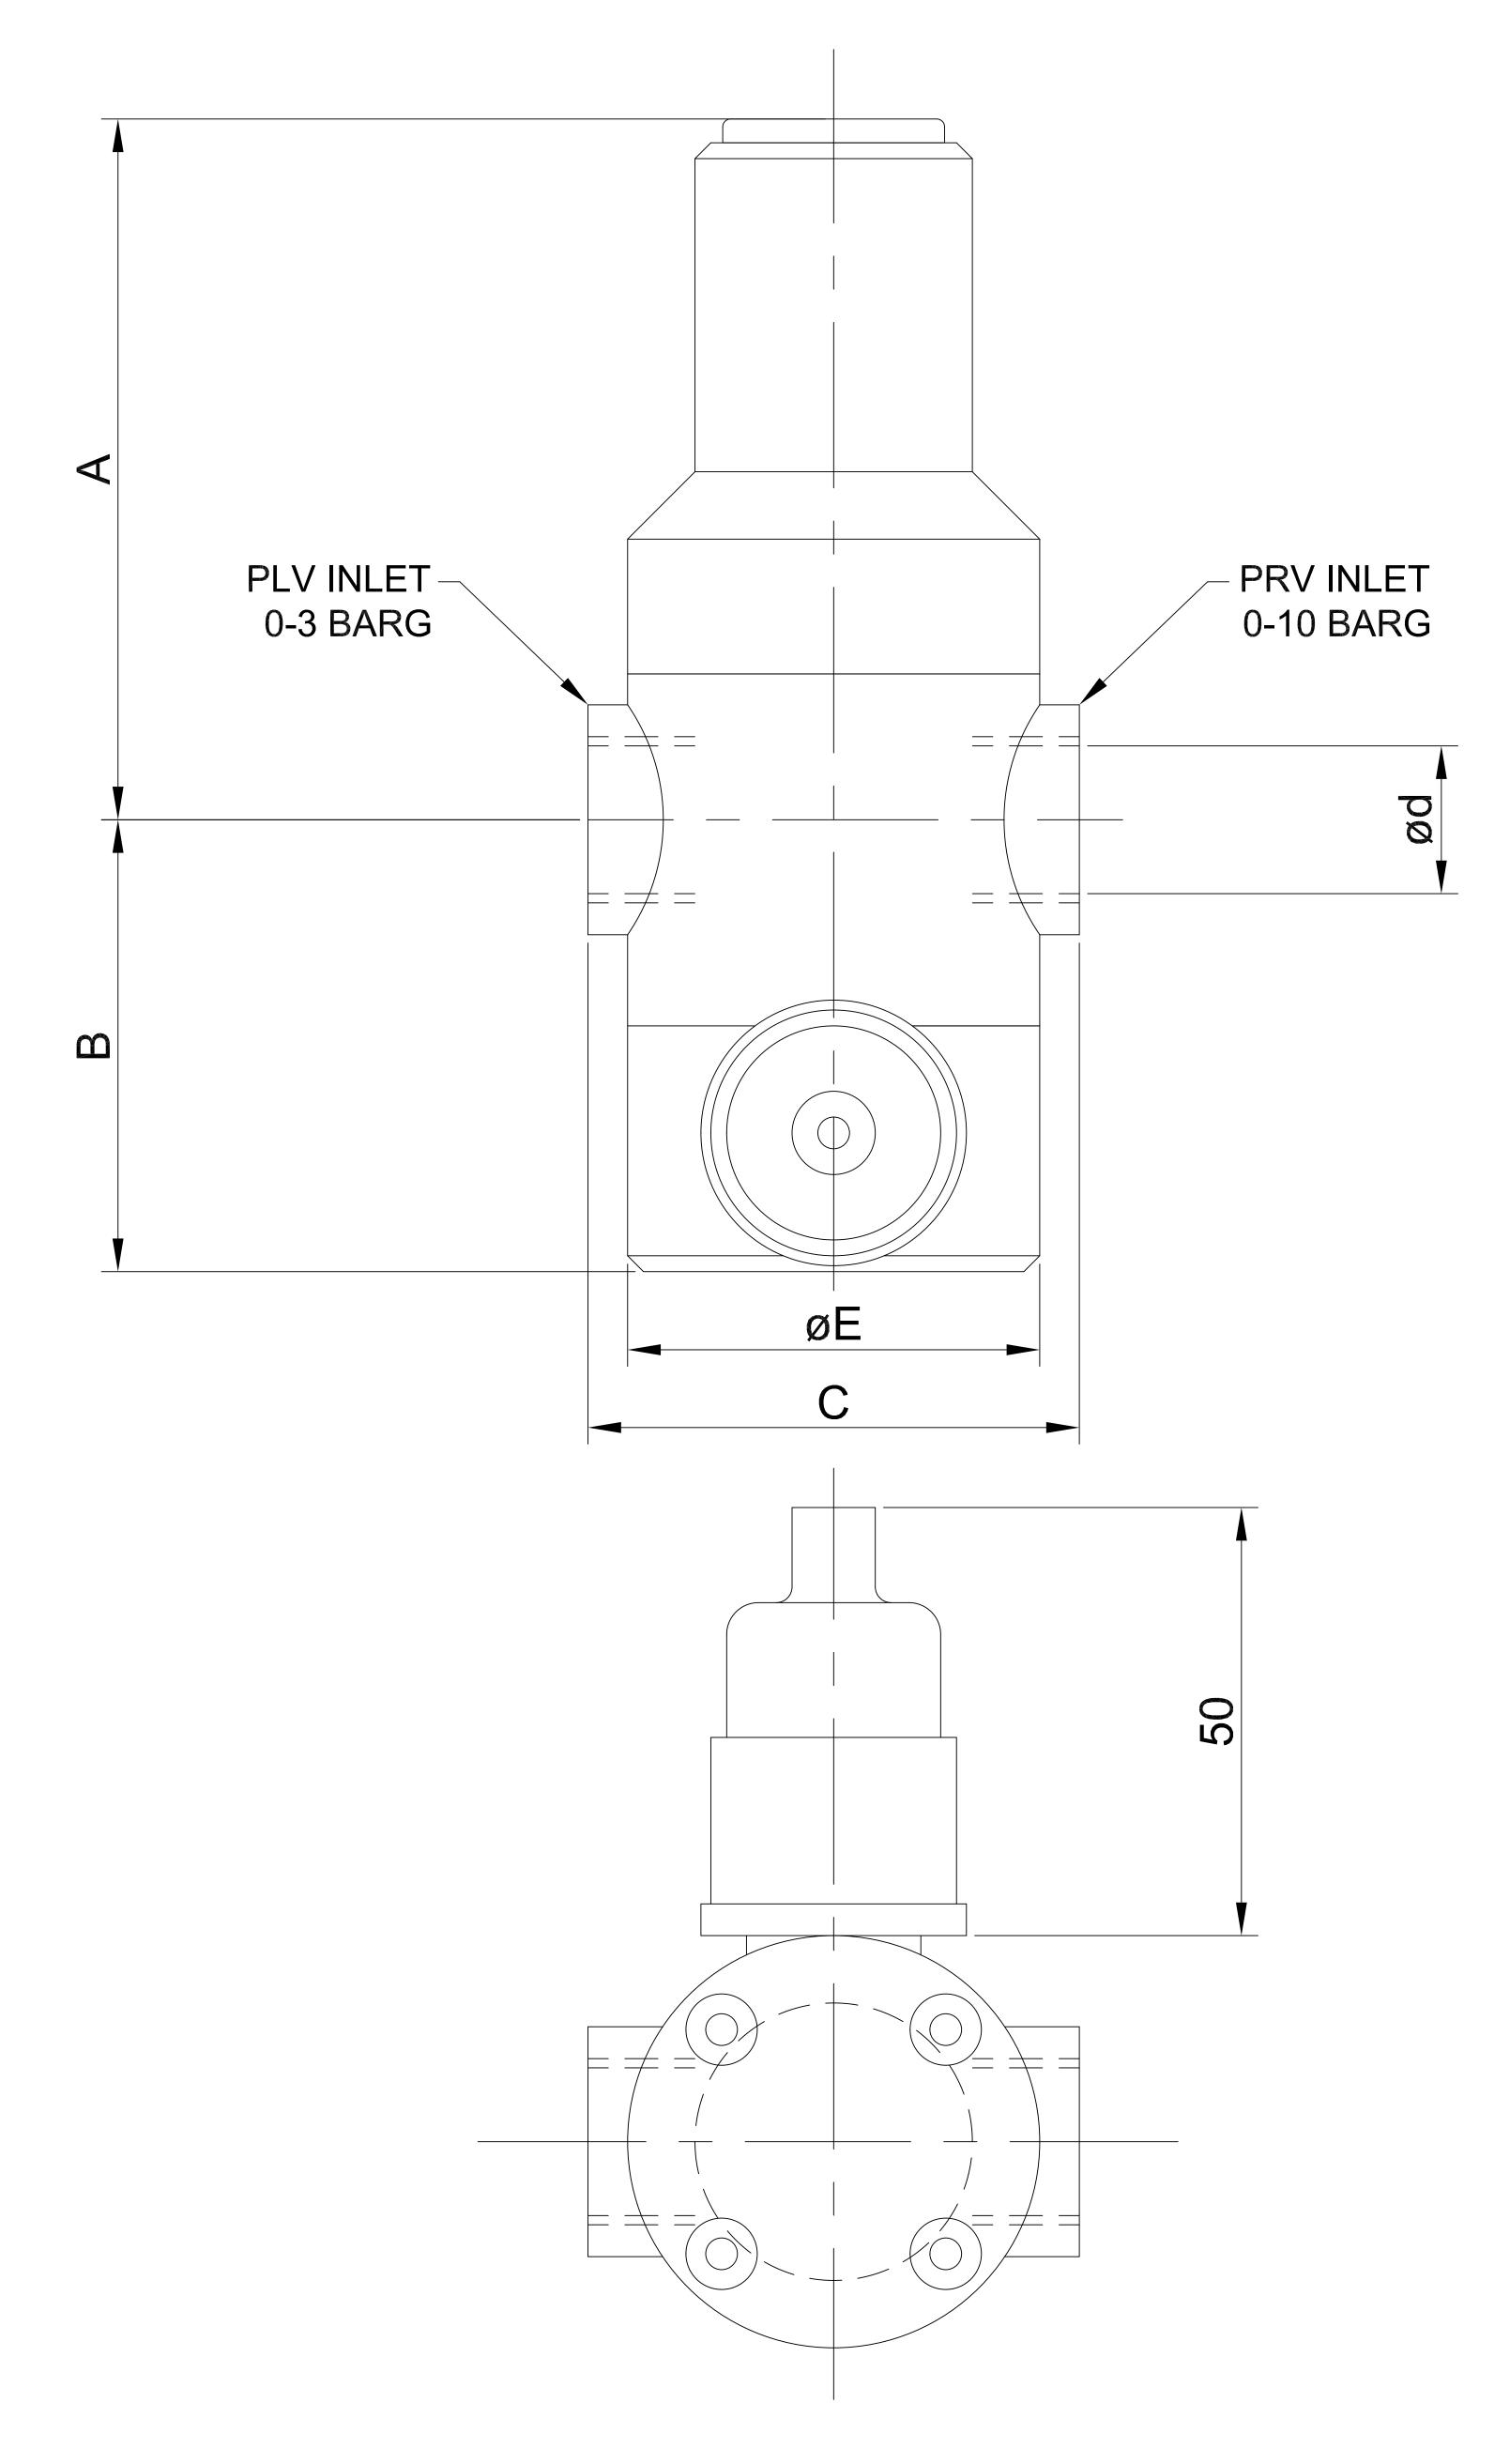

ød				В	С	D	E	F
O.D	DN	NB	A	Ь		D		Γ
16	10	3/8"	88	54	72		52	
20	15	1/2"	88	54	72		52	
25	20	3/4"	105	67	86		64	
32	25	1"	108	67	102		79	
40	32	11/4"	116	76	123		89	
50	40	1½"	140	80	140		109	
63	50	2"	156	91	163		126	

SWITCH RATING 100 VA @ 40 V MAX

PROTECTION IP65 WITH BOOT IP00 WITHOUT BOOT



28.09.12

SUBJECT 1100 SERIES WITH PRESSURE SENSOR - METAL SCREWED

PROCHEM SERVICES LTD

CONGLETON, CHESHIRE, CW12 2AD, ENGLAND

REV 0

DRAWING No. PS/12/969

VALVE SHOWN WITH PROTECTIVE BOOT IN PLACE.

VALVES DO NOT HAVE HOLD DOWN FIXED SCREWS

SWITCH DIAPHRAGM HOUSING ASSEMBLY IS PVC

WITH DIAPHRAGM MATERIAL TO MATCH VALVE

ALL DIMENSIONS IN MM UNLESS OTHERWISE

TOLERANCES: ± 0.5 UNLESS STATED

SWITCH ORIENTATION IS SUPPLIED AS SHOWN

UNLESS OPPOSITE IS REQUESTED.

IN THIS CONFIGURATION.

DIMENSION 'C' ± 1.00 MM

DIAPHRAGM.

STATED.

DRAWN RB DATE REV REV