


NOTE: The scale range of the pressure gauge should be approx. 30% higher than the value of the gas pre-charge.

PRESSURE GAUGE SCALE RANGE	GAS BLOCK REFERENCE CODE
6 bar	BV006A1TM
16 bar	BV016A1TM
25 bar	BV025A1TM
40 bar	BV040A1TM
60 bar	BV060A1TM
160 bar	BV160A1TM
250 bar	BV250A1TM
400 bar	BV400A1TM
600 bar	BV600A1TM
1,000 bar	BV1000A1TM

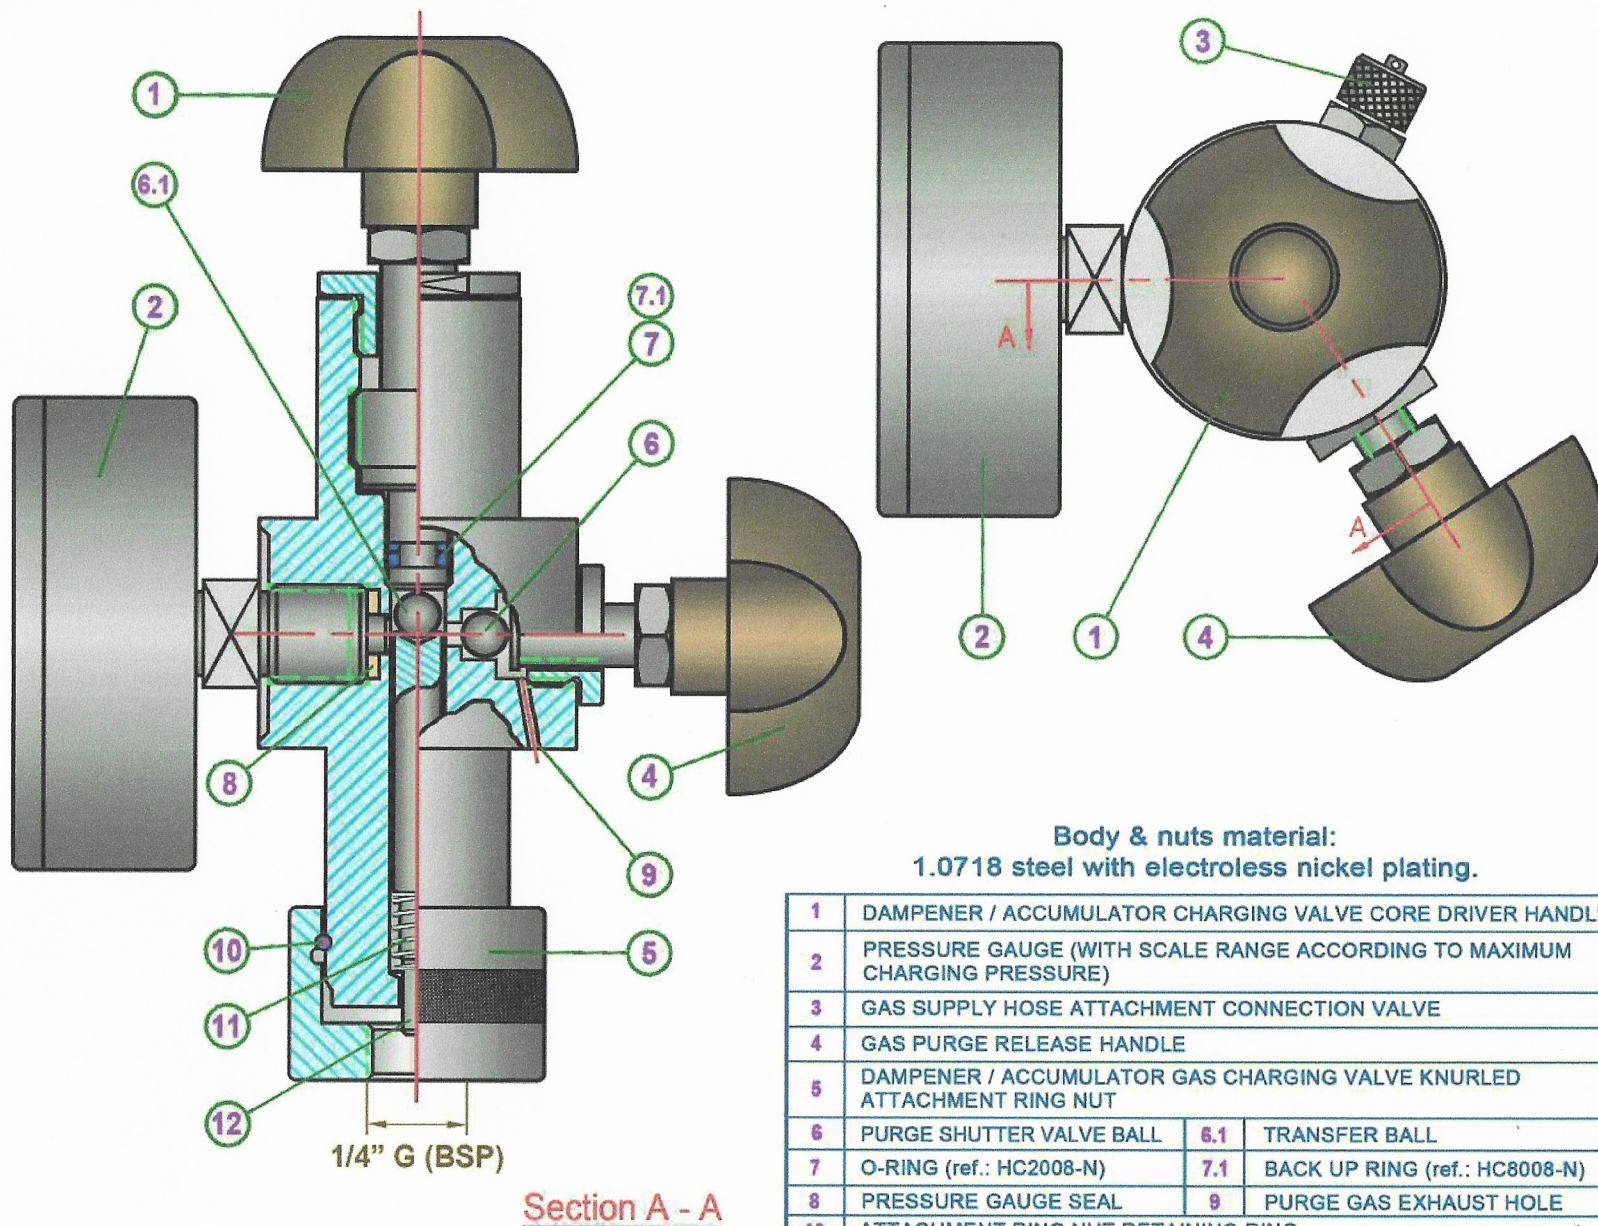

Body & nuts material:
1.0718 steel with electroless nickel plating.

1	DAMPENER / ACCUMULATOR CHARGING VALVE CORE DRIVER HANDLE	
2	PRESSURE GAUGE (WITH SCALE RANGE ACCORDING TO MAXIMUM CHARGING PRESSURE)	
3	GAS SUPPLY HOSE ATTACHMENT CONNECTION VALVE	
4	GAS PURGE RELEASE HANDLE	
5	DAMPENER / ACCUMULATOR GAS CHARGING VALVE KNURLED ATTACHMENT RING NUT	
6	PURGE SHUTTER VALVE BALL	6.1 TRANSFER BALL
7	O-RING (ref.: HC2008-N)	7.1 BACK UP RING (ref.: HC8008-N)
8	PRESSURE GAUGE SEAL	9 PURGE GAS EXHAUST HOLE
10	ATTACHMENT RING NUT RETAINING RING	
11	SPRING	12 VALVE CORE DEPRESSOR PIN



HIDRACAR S.A.

PROCHEM SERVICES

CORROSION RESISTANT FLUID HANDLING PRODUCTS

CONGLETON, CHESHIRE, CW12 2AD, U.K.

TEL. +44 (0)1260 299770 www.prochem-services.com

Customer

Customer ref.

Replaces drawing

BV(***)A1TM (Rev. 06)

Drawn by

E.Ponsa

Approved by

M. Carcaré

Title CHARGING AND CONTROL GAS BLOCK FOR
OUR PULSATION DAMPENERS AND ACCUMULATORS

Drawing

BV(***)A1TM

Rev.

07

Date

26/04/17

Scale

1/1